

Contact insert module - HC-M-05-PT-M

1417372
ID:1417372

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Contact insert module, number of positions: 5, power contacts: 5, control contacts: 0, Pin, Push-in connection, 400 V, 16 A, 0.14 mm² ... 2.5 mm², application: Power

Your advantages

- Easy installation without tools, even when mounted, with push-in connection technology
- Shortest installation time compared to other connection technologies
- Quick and effortless wiring, in particular when space is tight
- Automatic cabling with robots possible
- Safe wiring and operation with color-coded actuators
- Shock and vibration-resistant in accordance with DIN EN 61373

Commercial Data

Item number	1417372
Packing unit	5 pc
Minimum order quantity	5 pc
Product Key	BF7ACE
Catalog Page	Page 577 (C-2-2019)
GTIN	4055626112541
Weight per Piece (including packing)	15.32 g
Weight per Piece (excluding packing)	14.62 g
Customs tariff number	85366990
Country of origin	PL

Contact insert module - HC-M-05-PT-M

1417372

ID:1417372

Technical Data

Notes

General	only use flexible conductors with ferrules
General	Connectors may be operated only when there is no load/voltage.
General	For HEAVYCON housing type B6 to B48, HC-M-B...MF... module carrier frame required

Product properties

Product type	Modular contact insert
Number of positions	5
Connection profile	5
Application	Power
Number of module slots	1
No. of power contacts	5
No. of control contacts	0
Contact type	rolled
Series	HC-M-05

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Connection data


Connection technology

Connection technology	Push-in connection
-----------------------	--------------------

Conductor connection

Conductor cross section	0.14 mm ² ... 2.5 mm ²
	0.14 mm ² ... 2.5 mm ²
Connection cross section AWG	26 ... 14
Stripping length of the individual wire	8 mm ±1 mm

Dimensions

Dimensional drawing	
Width	34.2 mm
Height	35.5 mm
Length	14.6 mm

Contact insert module - HC-M-05-PT-M

1417372

ID:1417372

Mechanical characteristics

Minimum housing height	52 mm
Contact diameter	2.5 mm

Electrical properties

Rated voltage (III/3)	400 V
Rated surge voltage	4 kV
Rated current	16 A

Material specifications

Color	light grey
Flammability rating according to UL 94	V0
Contact material	Copper alloy
Contact surface material	Ag
Contact carrier material	PC
Standards/regulations	PC: Fire protection in rail vehicles - requirement sets R22, R23, and R24 acc. to DIN EN 45545-2 (Risk level HL1 - HL3)

Connector

Insertion/withdrawal cycles	≥ 500
-----------------------------	-------

Cable / line

Stripping length of the individual wire	8 mm ±1 mm
---	------------

Mounting

Assembly instructions	To ensure correct use, installation in housing with IP54 protection or better is required
-----------------------	---

Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C
---------------------------------	-------------------

Standards and regulations

Testing


Standards/regulations	PC: Fire protection in rail vehicles - requirement sets R22, R23, and R24 acc. to DIN EN 45545-2 (Risk level HL1 - HL3)
-----------------------	---

Contact insert module - HC-M-05-PT-M

1417372
ID:1417372


Drawings

Dimensional drawing

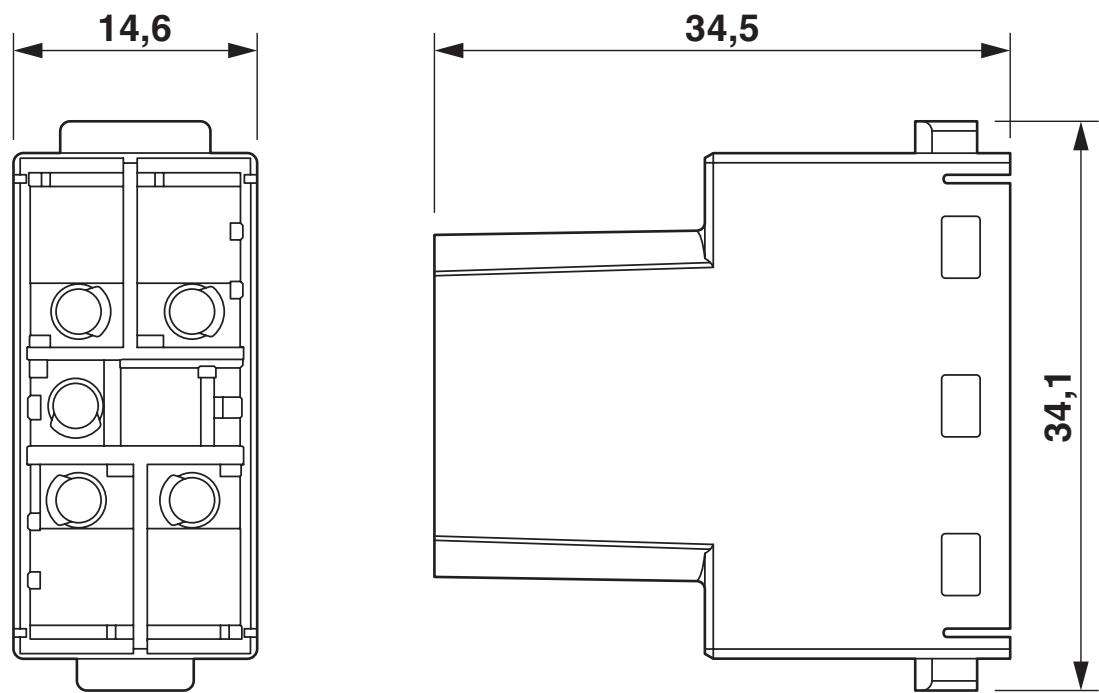

Dimensional drawing

Diagram

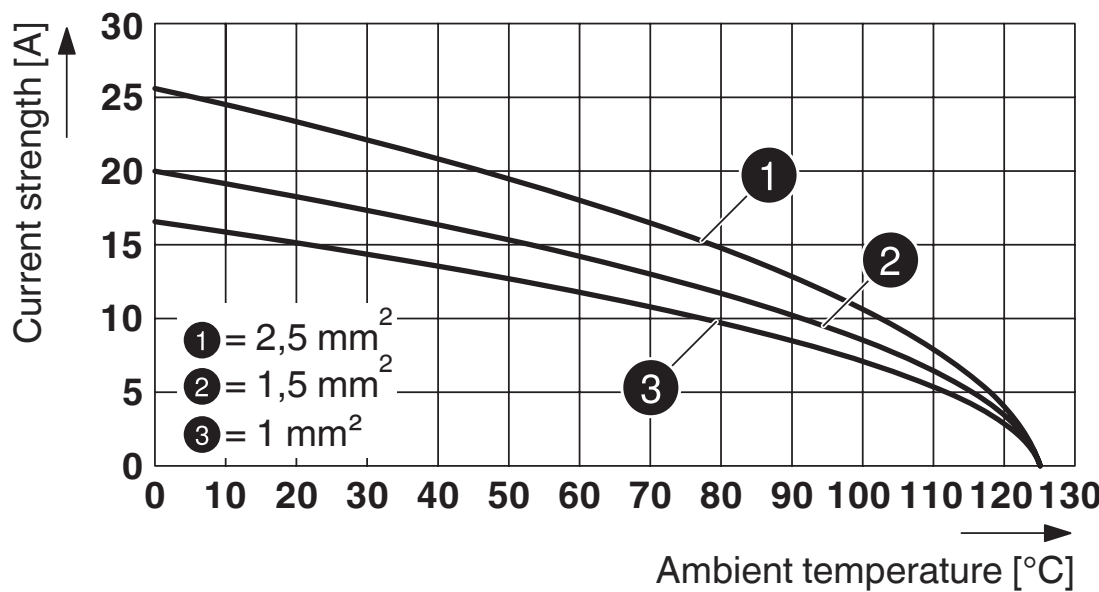


Derating diagram

Contact insert module - HC-M-05-PT-M

1417372

ID:1417372

Schematic diagram

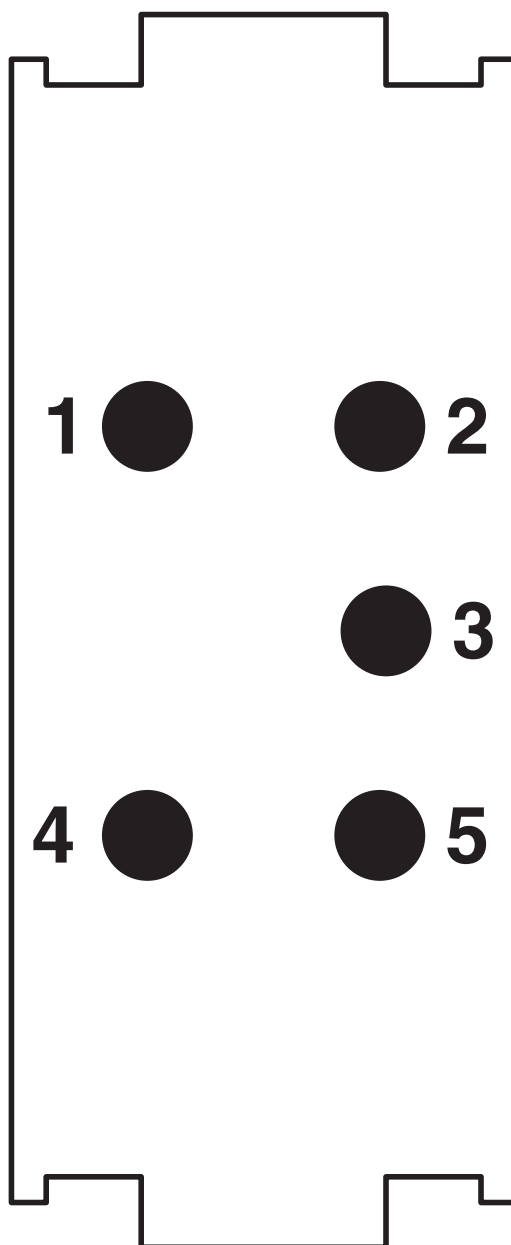

Connector pin assignment, connection side

Contact insert module - HC-M-05-PT-M

1417372

ID:1417372

Approvals

 CSA Approval ID: 13631				
	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
	600 V	15 A	- 14	-

 UL Recognized Approval ID: E118976				
	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
	600 V	19 A	- 14	-

 EAC Approval ID: RU C-DE.AI30.B.01102				
---	--	--	--	--

 EAC Approval ID: RU C-DE.BL08.B.00511				
---	--	--	--	--

Contact insert module - HC-M-05-PT-M

1417372

ID:1417372

Classifications

ECLASS

ECLASS-9.0	27440217
ECLASS-10.0.1	27440217
ECLASS-11.0	27440217

ETIM

ETIM 8.0	EC000438
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

Contact insert module - HC-M-05-PT-M

1417372

ID:1417372

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Contact insert module - HC-M-05-PT-M

1417372

ID:1417372

Accessories

Coding element

Coding element - HC-CBU-MOD - 1636130

ID:1636130



Coding socket for coding up to 16 connectors, for HC Modular

Coding element

Coding element - HC-CST-MOD - 1636127

ID:1636127



Coding peg for coding up to 16 connectors, for HC Modular

Contact insert module - HC-M-05-PT-M


1417372

ID:1417372

Module carrier frame

Module carrier frame - HC-M-B06-MFH-B - 1182085

ID:1182085




Module carrier frame, size: B6, type : for the panel mounting side (a, b, c, ...), 4 mm² ... 6 mm², application: Module carrier frame

Module carrier frame

Module carrier frame - HC-M-B10-MFH-B - 1182088

ID:1182088



Module carrier frame, size: B10, type : for the panel mounting side (a, b, c, ...), 4 mm² ... 6 mm², application: Module carrier frame

Contact insert module - HC-M-05-PT-M

1417372

ID:1417372

Module carrier frame

Module carrier frame - HC-M-B16-MFH-B - 1182090

ID:1182090

Module carrier frame, size: B16, type : for the panel mounting side (a, b, c, ...), 4 mm² ... 6 mm², application: Module carrier frame



Module carrier frame

Module carrier frame - HC-M-B24-MFH-B - 1182094

ID:1182094

Module carrier frame, size: B24, type : for the panel mounting side (a, b, c, ...), 4 mm² ... 6 mm², application: Module carrier frame



Contact insert module - HC-M-05-PT-M

1417372

ID:1417372

Module carrier frame

Module carrier frame - HC-M-B06-MFH-H - 1182087

ID:1182087



Module carrier frame, size: B6, type : for the sleeve side (A, B, C, ...), 4 mm² ... 6 mm², application: Module carrier frame

Module carrier frame

Module carrier frame - HC-M-B10-MFH-H - 1182089

ID:1182089



Module carrier frame, size: B10, type : for the sleeve side (A, B, C, ...), 4 mm² ... 6 mm², application: Module carrier frame

Contact insert module - HC-M-05-PT-M

1417372


ID:1417372

Module carrier frame

Module carrier frame - HC-M-B16-MFH-H - 1182093

ID:1182093

Module carrier frame, size: B16, type : for the sleeve side (A, B, C, ...), 4 mm² ...
6 mm², application: Module carrier frame



Module carrier frame

Module carrier frame - HC-M-B24-MFH-H - 1182095

ID:1182095

Module carrier frame, size: B24, type : for the sleeve side (A, B, C, ...), 4 mm² ...
6 mm², application: Module carrier frame



Contact insert module - HC-M-05-PT-M

1417372

ID:1417372

Crimping pliers

Crimping pliers - CRIMPFOX CENTRUS 6S - 1213144

ID:1213144



Crimping pliers, for uninsulated and insulated ferrules, DIN 46228 Part 1 and 4, from 0.14 mm² ... 6 mm², also for TWIN ferrules up to 2 x 4 mm², automatic cross section adjustment, lateral insertion, equipped with fall protection

Crimping pliers

Crimping pliers - CRIMPFOX 6 - 1212034

ID:1212034



Crimping pliers, for ferrules without insulating collar according to DIN 46228 Part 1 and ferrules with insulating collar according to DIN 46228 Part 4, 0.25 mm² ... 6.0 mm², lateral entry, trapezoidal crimp

Contact insert module - HC-M-05-PT-M

1417372

ID:1417372

Electrical crimping tool

Electrical crimping tool - CF CRIMPHANDY 0,5 - 1212463

ID:1212463



Mobile handheld device, battery-powered, for processing on-tape ferrules 0.5 mm² with functional end, suitable for PVC insulated conductors (H05V-K), incl. battery, charger, CUTFOX 12 cable cutter, waste guide plate 2, service tool for error correction, and one strip of ferrules 0.5 mm², packed in a robust case.

Electrical crimping tool

Electrical crimping tool - CF CRIMPHANDY 0,75 - 1212464

ID:1212464



Mobile handheld device, battery-powered, for processing on-tape ferrules 0.75 mm² with functional end, suitable for PVC insulated conductors (H05V-K), incl. battery, charger, CUTFOX 12 cable cutter, waste guide plate 2, service tool for error correction, and one strip of ferrules 0.75 mm², packed in a robust case.

Contact insert module - HC-M-05-PT-M

1417372

ID:1417372

Electrical crimping tool

Electrical crimping tool - CF CRIMPHANDY 1,0 - 1212465

ID:1212465



Mobile handheld device, battery-powered, for processing on-tape ferrules 1.0 mm² with functional end, suitable for PVC insulated conductors (H05V-K), incl. battery, charger, CUTFOX 12 cable cutter, waste guide plate 2, service tool for error correction, and one strip of ferrules 1.0 mm², packed in a robust case.

Electrical crimping tool

Electrical crimping tool - CF CRIMPHANDY 1,5 - 1212466

ID:1212466



Mobile handheld device, battery-powered, for processing on-tape ferrules 1.5 mm² with functional end, suitable for PVC insulated conductors (H07V-K), incl. battery, charger, CUTFOX 12 cable cutter, waste guide plate 2, service tool for error correction, and one strip of ferrules 1.5 mm², packed in a robust case.

Contact insert module - HC-M-05-PT-M

1417372

ID:1417372

Contact insert module

Contact insert module - HC-M-05-PT-F - 1417373

ID:1417373



Contact insert module, number of positions: 5, power contacts: 5, control contacts: 0, Socket, Push-in connection, 400 V, 16 A, 0.14 mm² ... 2.5 mm², application: Power