

Housing - HC-EVO-B24-HHFD-2B-PL-BK

1411497

1411497

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Sleeve housing B24, for double locking latch, material: PA, cable outlets: 2, straight/lateral, height: 87.5 mm, cable gland: none, protective cover: no, Standard

Your advantages

- Flexible cable outlet direction, lateral or straight
- Lower costs than metal version
- Low weight
- Lower risk of condensation

Commercial Data

Item number	1411497
Packing unit	1 pc
Minimum order quantity	1 pc
Product Key	BF7APL
Catalog Page	Page 636 (C-2-2019)
GTIN	4046356933070
Weight per Piece (including packing)	142.9 g
Weight per Piece (excluding packing)	142.9 g
Customs tariff number	85389099
Country of origin	PL

Housing - HC-EVO-B24-HHFD-2B-PL-BK

1411497

1411497

Technical Data


Notes

General	for contact inserts HC-B24, BB46, D64, DD108, M, K, HV10
---------	--

Product properties

Type	B24
Product type	Housing with locking latch
Application	Standard
No. of cable outlets	2
Housing type	Sleeve housing
Protective cover	no
Locking type	for double locking latch
Cable outlet	straight
Pg screw connection	none

Dimensions

Dimensional drawing	
Width	44 mm
Height	87.5 mm
Length	120 mm

Material specifications

Color	black
Flammability rating according to UL 94	V0 (Housing)
Impact strength	IK09
Housing material	PA

Ambient conditions

Degree of protection	IP66
Degree of protection	12 (UL 50e)
Impact strength	IK09
Ambient temperature (operation)	-40 °C ... 125 °C (static)

Mechanical properties

Mechanical data	
Locking type	Pin

Mounting

Housing - HC-EVO-B24-HHFD-2B-PL-BK

1411497
1411497

Assembly instructions	The sleeve base housing must be supplemented with the EVO screw connection. The EVO screw connection is available in 4 sizes. It enables the creation of a straight or a lateral cable outlet. The EVO screw connection is assembled by hand or using a pipe wrench.
-----------------------	--


Housing - HC-EVO-B24-HHFD-2B-PL-BK

1411497

1411497

Drawings

Dimensional drawing

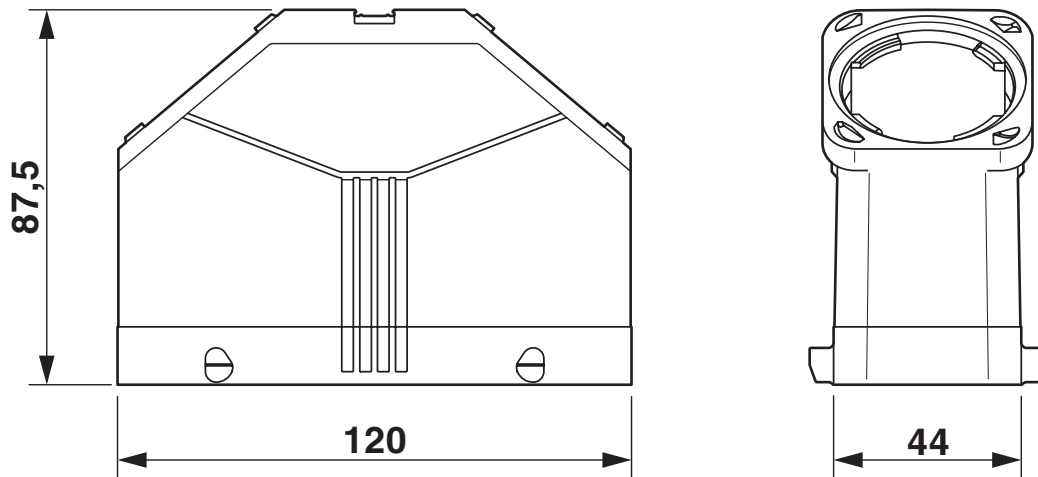

Dimensional drawing

Housing - HC-EVO-B24-HHFD-2B-PL-BK

1411497
1411497

Approvals

DNV

Approval ID: TAE000037S

 cUL Recognized

Approval ID: E255026

 UL Recognized

Approval ID: E255026

 EAC

EAC

Approval ID: RU C-DE.AI30.B.01102

 EAC

EAC

Approval ID: RU C-DE.BL08.B.00511

cULus Recognized

Housing - HC-EVO-B24-HHFD-2B-PL-BK

1411497

1411497

Classifications

ECLASS

ECLASS-9.0	27440202
ECLASS-10.0.1	27440202
ECLASS-11.0	27440202

ETIM

ETIM 8.0	EC000437
----------	----------

UNSPSC

UNSPSC 21.0	31261500
-------------	----------

Housing - HC-EVO-B24-HHFD-2B-PL-BK

1411497
1411497

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Housing - HC-EVO-B24-HHFD-2B-PL-BK

1411497

1411497

Accessories

Snap-in markers

Snap-in markers - US-EMP (20X9) - 0829439

0829439



Snap-in markers, Card, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, lettering field size: 20 x 9 mm, Number of individual labels: 70

Cable gland

Cable gland - HC-B-G-M20-PLRBK - 1407669

1407669



EVO plastic cable gland with bayonet locking, for housing series B, size M20, cable diameter: 7 mm ... 13 mm

Housing - HC-EVO-B24-HHFD-2B-PL-BK

1411497

1411497

Cable gland

Cable gland - HC-B-G-M25-PLRBK - 1407670

1407670



EVO plastic cable gland with bayonet locking, for housing series B, size M25, cable diameter: 9 mm ... 17 mm

Cable gland

Cable gland - HC-B-G-M32-PLRBK - 1407671

1407671



EVO plastic cable gland with bayonet locking, for housing series B, size M32, cable diameter: 11 mm ... 21 mm

Housing - HC-EVO-B24-HHFD-2B-PL-BK

1411497

1411497

Cable gland

Cable gland - HC-B-G-M40-PLRBK - 1407672

1407672



EVO plastic cable gland with bayonet locking, for housing series B, size M40, cable diameter: 19 ... 28 mm

Corrugated tube screw connection

Corrugated tube screw connection - HC-B-GCA-M20-PLRBK - 1412021

1412021



EVO corrugated pipe screw connection, size: M20, protection class: IP66, plastic

Housing - HC-EVO-B24-HHFD-2B-PL-BK

1411497

1411497

Corrugated tube screw connection

Corrugated tube screw connection - HC-B-GCA-M25-PLRBK - 1411973

1411973



EVO corrugated pipe screw connection, size: M25, protection class: IP66, plastic

Corrugated tube screw connection

Corrugated tube screw connection - HC-B-GCA-M32-PLRBK - 1412022

1412022



EVO corrugated pipe screw connection, size: M32, protection class: IP66, plastic

Housing - HC-EVO-B24-HHFD-2B-PL-BK

1411497

1411497

Corrugated tube screw connection

Corrugated tube screw connection - HC-B-GCA-M40-PLRBK - 1412023

1412023



EVO corrugated pipe screw connection, size: M40, protection class: IP66, plastic

Protective cover

Protective cover - HC-B24-HCLWD-PLR-BK - 1414640

1414640



Protective cover B24, with double locking latch, protective cover material: PA, height: 21.6 mm, seal: yes, diameter of retaining cord eyelet: 30 mm