

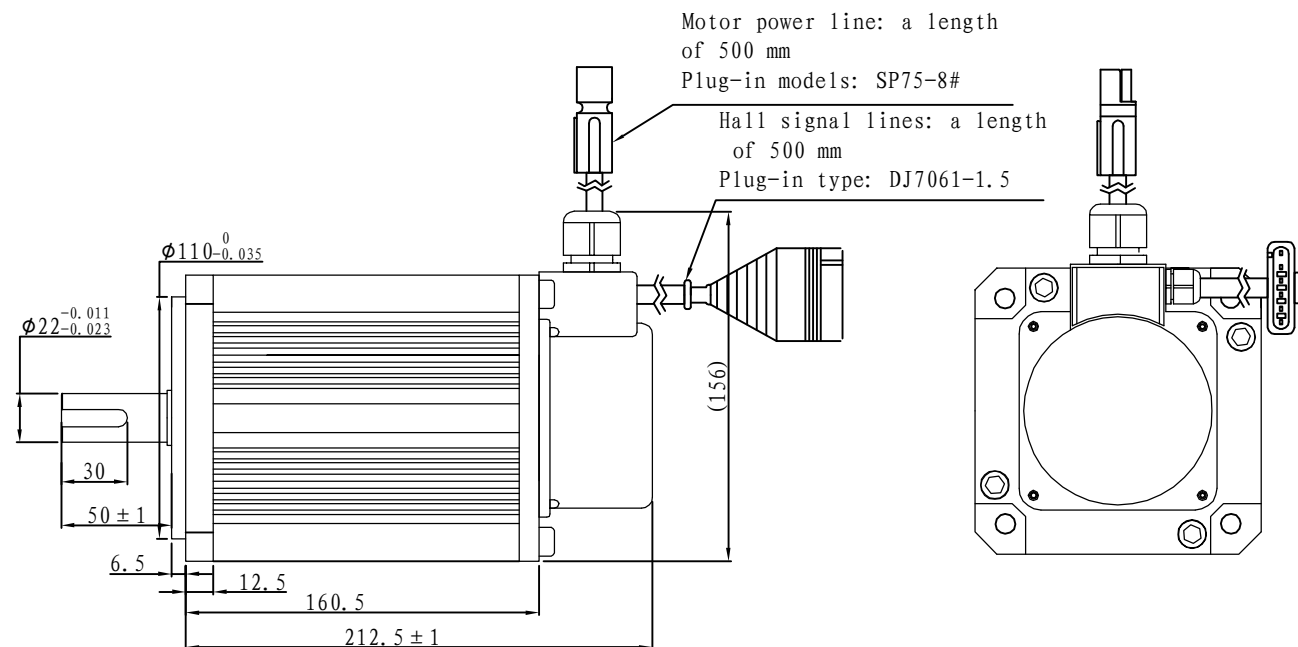


Demension

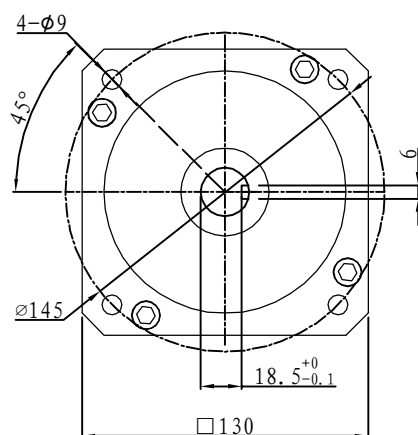

Motor to Hall Relationship

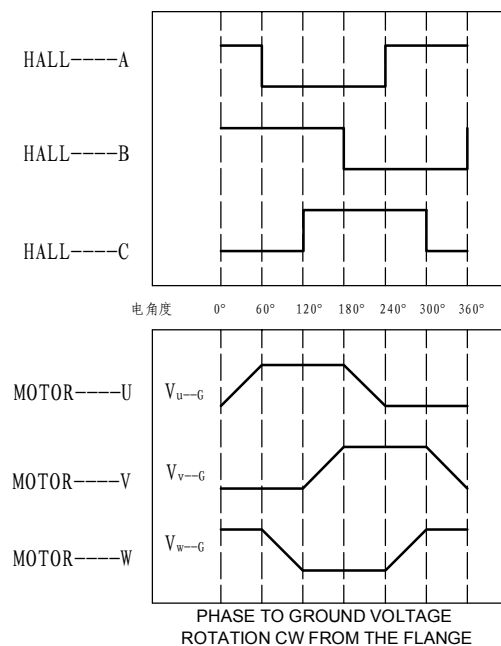

Line Define

Power Wire

Red	Motor U
Yellow	Motor V
Blue	Motor W



Feedback Wire

Hall line colour	Hall signal definition	Plug serial number
Orange and black	5V	1
Orange	0V	2
Yellow	Hall A	4
Blue	Hall B	5
Green	Hall C	6


Tecnichal Data

Type	130WD-M07720-24V
Power (KW)	1.6
Rated voltage (V)	24
Rated current (A)	79
Rated speed (rpm)	2000
Rated torque (NM)	7.7
Rotor inertia (Kgcm2)	15.8
Protection rank	IP65
Insulation rank	F
Appropriate environment	Temperature: 0~50℃ Humidity: <90% (No dewdrop)
Motor weight (KG)	9.05

Demension

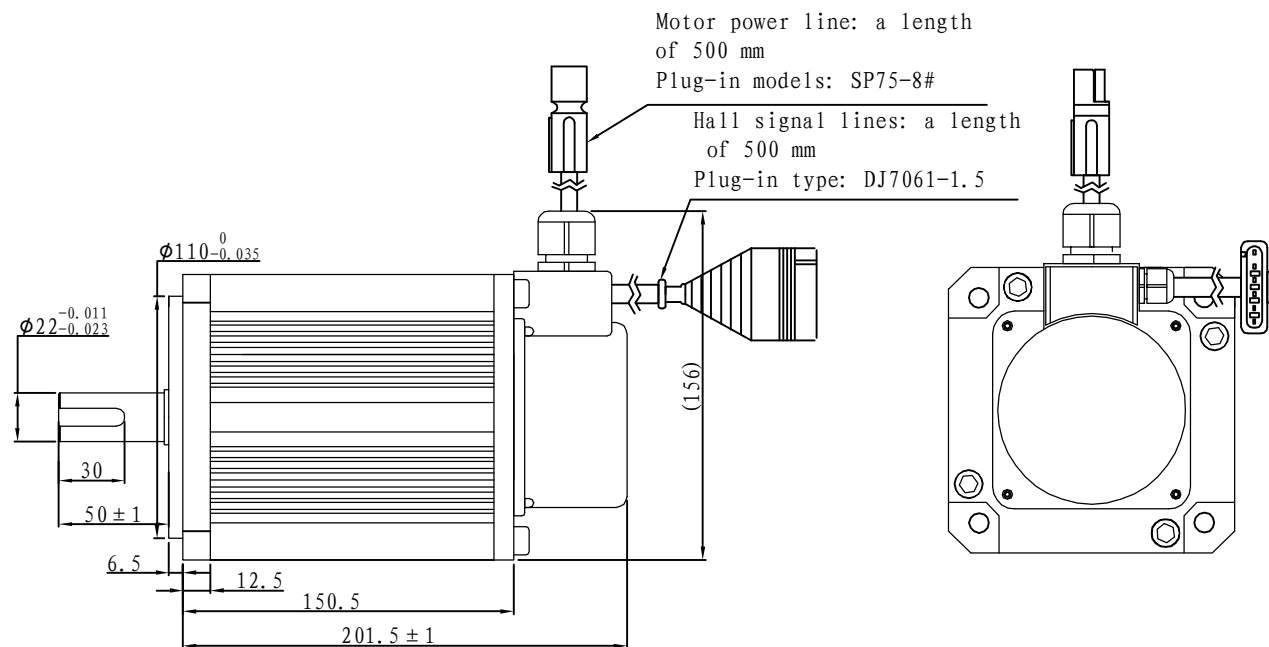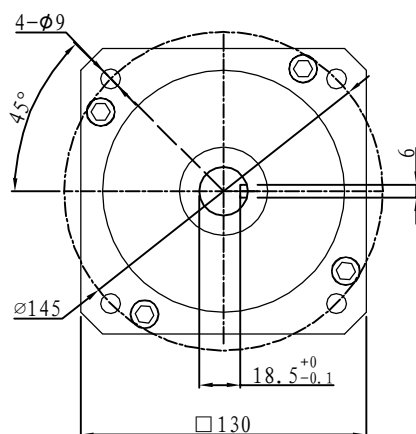

Motor to Hall Relationship

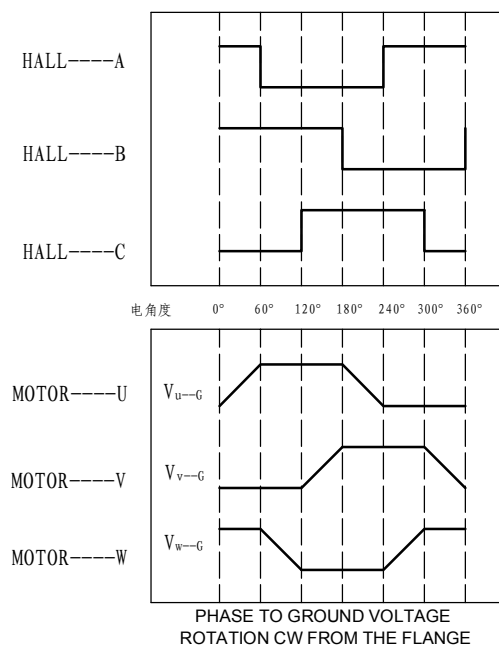

Line Define

Power Wire

Red	Motor U
Yellow	Motor V
Blue	Motor W



Feedback Wire

Hall line colour	Hall signal definition	Plug series number
Orange and black	5V	1
Orange	0V	2
Yellow	Hall A	4
Blue	Hall B	5
Green	Hall C	6


Tecnical Data

Type	130WD-M07720-48V
Power (KW)	1. 6
Rated voltage (V)	48
Rated current (A)	39. 5
Rated speed (rpm)	2000
Rated torque (NM)	7. 7
Rotor inertia (Kgcm2)	15. 8
Protection rank	IP65
Insulation rank	F
Appropriate environment	Temperature: 0 ~ 50℃ Humidity: <90% (No dewdrop)
Motor weight (KG)	9. 05

Demension

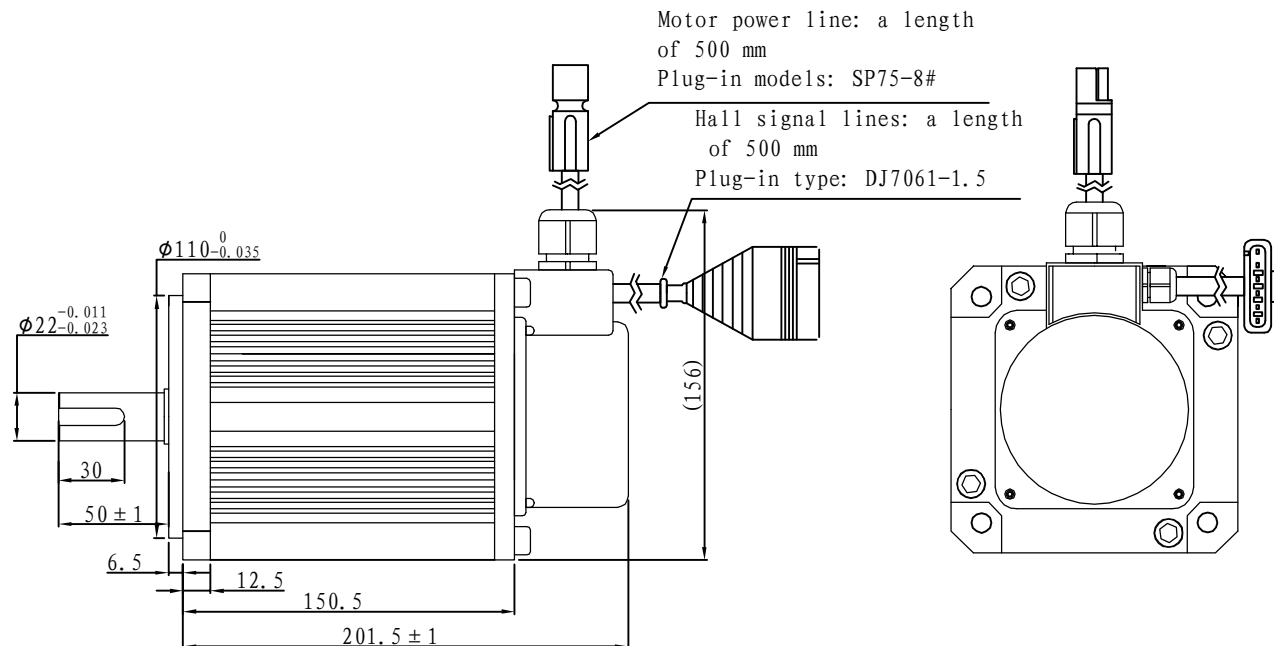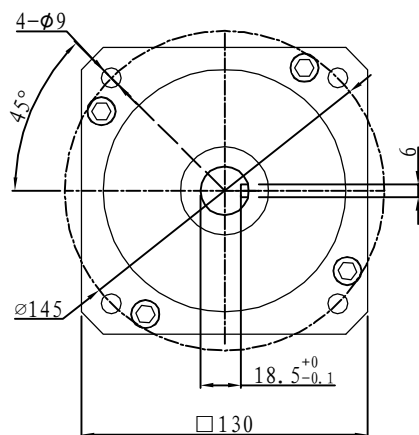

Motor to Hall Relationship

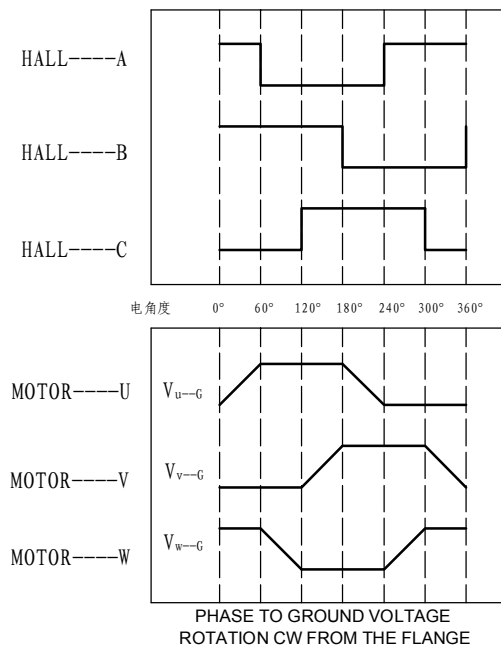

Line Define

Power Wire

Red	Motor U
Yellow	Motor V
Blue	Motor W



Feedback Wire

Hall line colour	Hall signal definition	Plug serial number
Orange and black	5V	1
Orange	0V	2
Yellow	Hall A	4
Blue	Hall B	5
Green	Hall C	6


Tecnichal Data

Type	130WD-M07720-72V
Power (KW)	1.6
Rated voltage (V)	72
Rated current (A)	26.3
Rated speed (rpm)	2000
Rated torque (NM)	7.7
Rotor inertia (Kgcm ²)	15.8
Protection rank	IP65
Insulation rank	F
Appropriate environment	Temperature: 0~50℃ Humidity: <90% (No dewdrop)
Motor weight (KG)	9.05

Demension

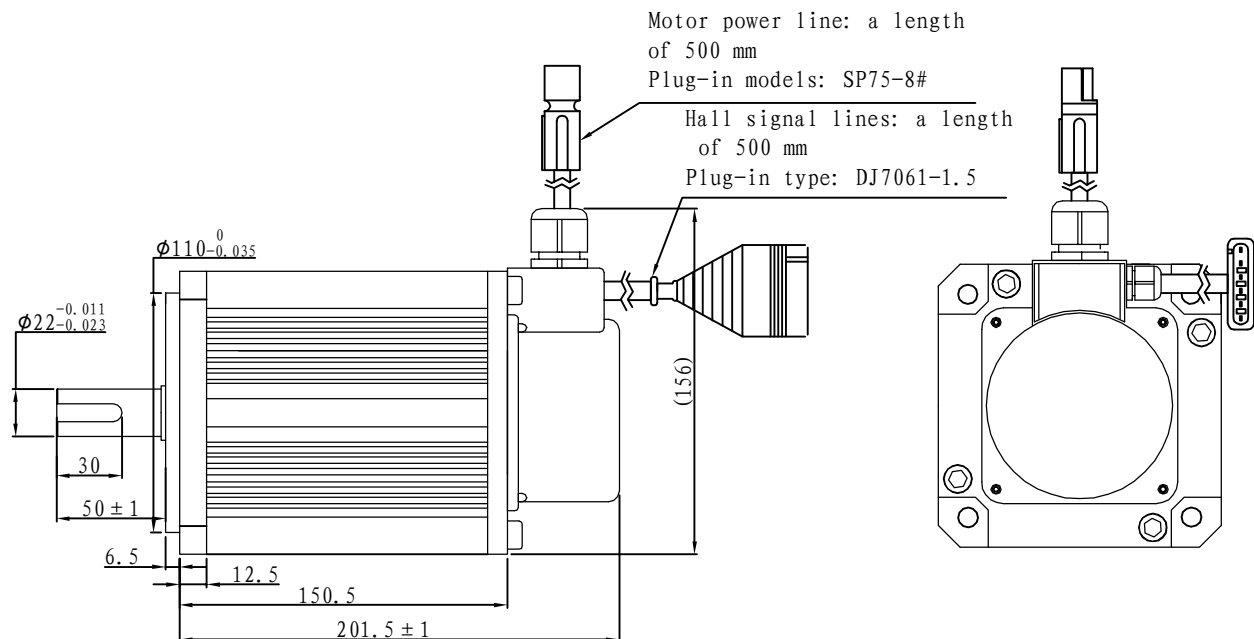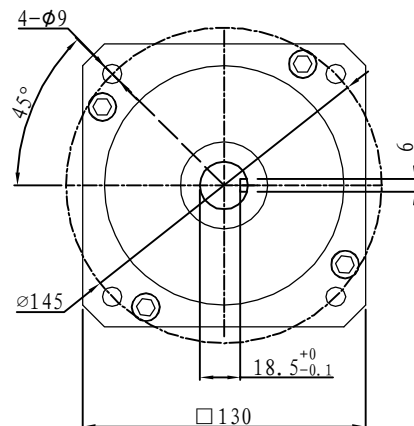

Motor to Hall Relationship

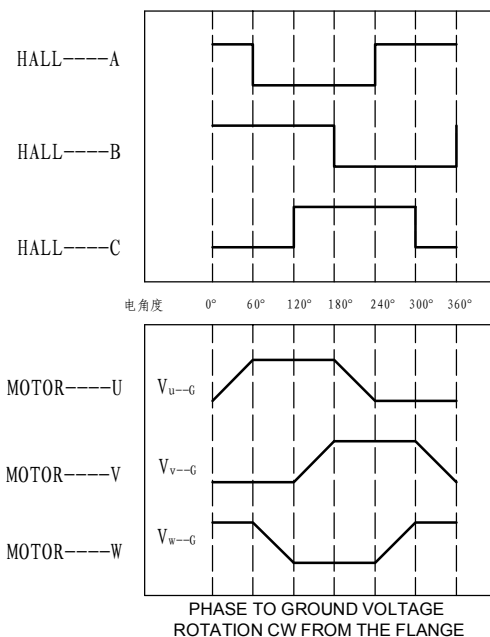

Line Define

Power Wire

Red	Motor U
Yellow	Motor V
Blue	Motor W

Feedback Wire

Hall line colour	Hall signal definition	Plug serial number
Orange and black	5V	1
Orange	0V	2
Yellow	Hall A	4
Blue	Hall B	5
Green	Hall C	6

Tecnichal Data

Type	130WD-M07720-96V
Power (KW)	1.6
Rated voltage (V)	96
Rated current (A)	19.8
Rated speed (rpm)	2000
Rated torque (NM)	7.7
Rotor inertia (Kgcm ²)	15.8
Protection rank	IP65
Insulation rank	F
Appropriate environment	Temperature: 0 ~ 50℃ Humidity: <90% (No dewdrop)
Motor weight (KG)	9.05